
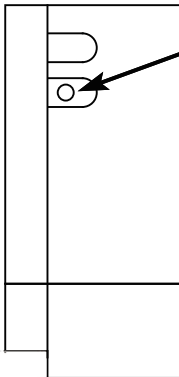


# WIRING DIAGRAM

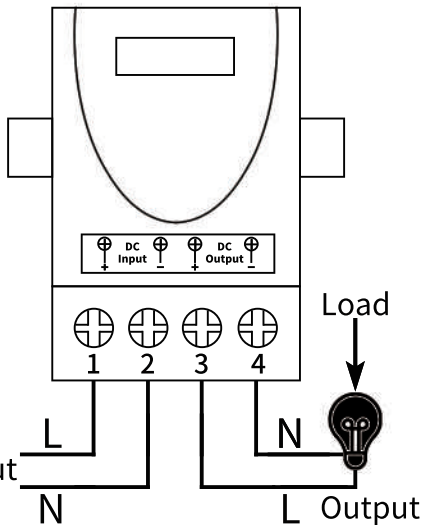

Learning Button

(Don't press it when it's not necessary)

About Working way:

Momentary: Press and hold -> On; Release -> Off.

Toggle: Press -> On; Press same button again -> Off.

Latched: Press -> On; Press other button -> Off.

Delay time: Press remote control button, the corresponding relay actuates and keeps working until the time out.

Reset: Press learning button 8s on the receiver when you want to change the working mode or clear memory.

## Pairing Steps:

Momentary mode: Press the learning button 1 time. The indicator flashes 1 time, then press ON button once on the remote to finish the pairing.

Toggle mode: Press the learning button 2 times. The indicator flashes 2 times, then press ON button once on the remote to finish the pairing.

Latched mode: Firstly press the learning button 3 times. The indicator will flash 3 times, then press the ON button on the remote, finally press the OFF button on the remote to finish the pairing.

Delay time (5S): Press the Learning Button 4 times. The Led indicator flash 4 times, then press ON button once, the Led indicator flash for 3 times to finish the pairing.

Delay time (10S): Press the Learning Button 5 times. The Led indicator flash 5 times, then press ON button once, the Led indicator flash for 3 times to finish the pairing.

Delay time (15S): Press the Learning Button 6 times. The Led indicator flash 6 times, then press ON button once, the Led indicator flash for 3 times to finish the pairing.